


# HITACHI **75** inch UHD Interactive Flat Panel Display

Inspire the Next

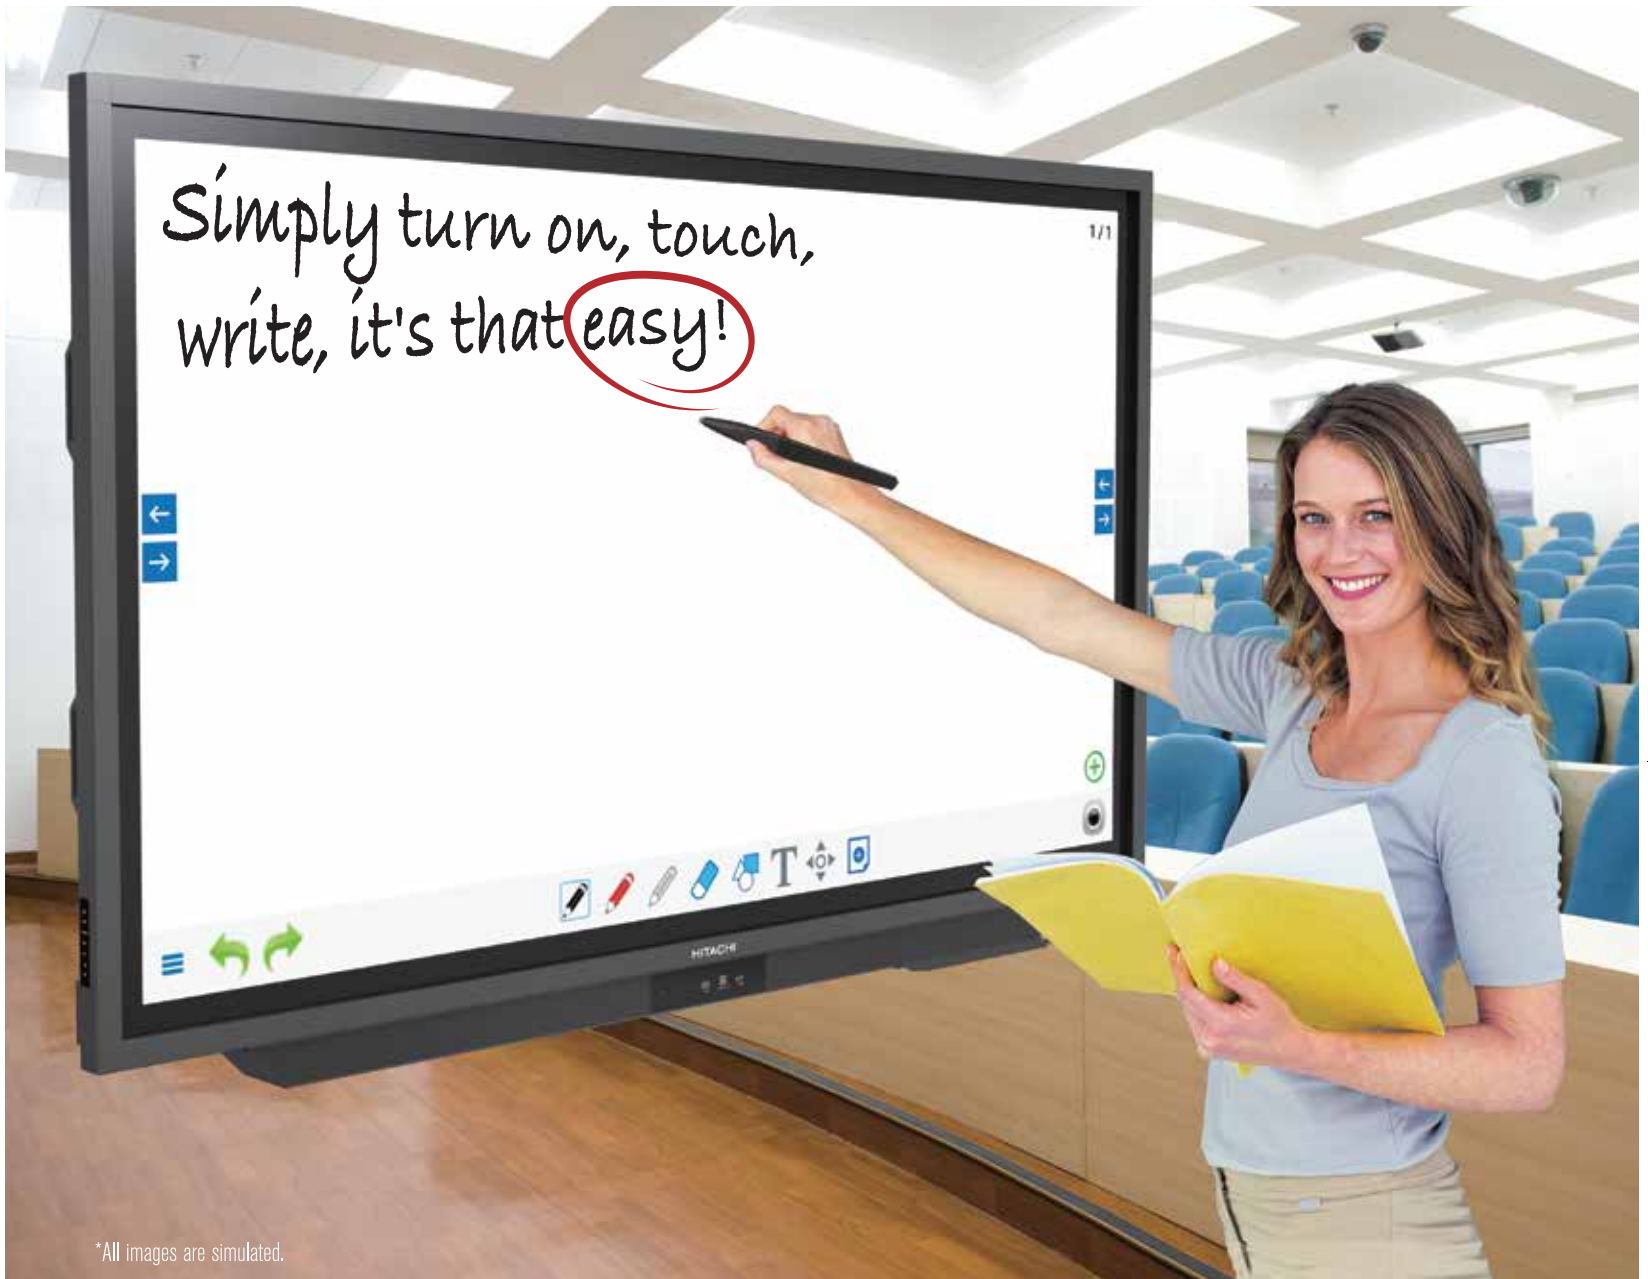

\*All images are simulated.

- **New 75 inch Ultra HD(4K) Resolution Panel**  
All-in-one solution with screen size of 75 inch Ultra HD panel.
- **Up to 20 point of touch (simultaneous)**  
Ideal function for class rooms.  
You can write from both right and left sides at the same time.
- **Front facing stereo speakers (40W total)**  
40W stereo speakers facilitate to deliver the sound to your audience effectively.
- **Both Windows® and Mac OS® compatible**
- **PC-less writing function**  
Once you turn on the power, you can immediately start writing by selecting Drawing mode, just one action.
- **Front HDMI and USB inputs**  
Simply plug in your computer with HDMI and USB for touch control and you are ready to go.
- **More convenient features are available, including**  
LAN port for control, OPS slot, magnetic stylus pens, four carrying handles on the rear.



**HILU75202**

Technical Specifications

LED PANEL	
Diagonal size	74.52"/189.3(cm)
Display Resolution (Max.)	3840 x 2160 (UHD)
Brightness (average)	350 cd/ m <sup>2</sup>
Viewing Angle	H: 170° / V: 170°
Contrast ratio	1000:1 (Typ.)
Supported Colors	1.07B colors (10bit)
Response Time	6.5 ms (GTG)
Display Frame Rate	60Hz (Actual)
Installation	Landscape Orientation
TOUCH	
Detect area	1647.66(H) x 925.94(V) mm
Detection method	Infrared blocking Detection Method
Touch tool	Hand or other solid object(except sharpness)
Accuracy	±2mm
Response time	< 12ms
Available Touch Point	20 Points (Windows) 4 points (Mac with driver software) 1 point (Mac without driver software)
Operating Systems	Windows 7, 8, 10 / MAC 10.10-10.12
PC connector	USB
SIGNAL CONNECTIVITY	
Connector	Front: HDMI x1, USB-B(for touch)x1, USB-A(for data)x1 Back: HDMI x4 ( Rear x3, Inside OPS x1), Audio Mini in, DP, USB-B(for touch)x1, HDMI Out(HDMI Pass-Through)
Audio Out	Speaker out (R/L) , Line out
Communication Port	RS-232C (D-sub 9-pin) or LAN(RJ45)
OPS Slot	1
MECHANICAL	
Dimensions Landscape	1776 x 1113 x 97 mm
Weight	65 kg (143 lbs)
VESA mount	600 x 400 (mm), M8 Screw
Front Glass	Tempered Glass 4.0t (Anti-glare Type)
ELECTRICAL	
Power Requirement	110 - 240V AC, 50/60 Hz
Power Consumption	Max. 438W
Power Consumption (Standby)	< 0.5W
Speaker Output	20W + 20W Stereo (8-ohms)
ENVIRONMENTAL	
Operating Temperature	0 ~ 40 °C (32 ~ 104 °F)
Storage Temperature	- 20 ~ 60 °C (-4 ~ 140 °F)
Operating Humidity	20% to 80% RH (no condensation)
OSD FUNCTIONS	
OSD Language Function	English / Français / Deutsch / Spanish / Portuguese /Italiano / Danish / Swedish / Norwegian / Suomi / Russian / Polish /Turkish / Hungarian / Chesky / Korean / Japanese / Chinese
ACCESSORIES	
Touch Pen x 2 , Detachable magnet pen tray, Remote controller, HDMI Cable, USB Cable, Power Cable, CD(User Manual, Installation Manual, Touch driver)	



- Design and specifications are subject to change without notice.
- Microsoft, Encarta, MSN, and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
- Mac OS® is registered trademarks of Apple Inc.
- HDMI, High-Definition Multimedia Interface, and the HDMI logo are trademarks or registered trademarks of HDMI Licensing, LLC in the United States and/or other countries.
- All other trademarks and registered trademarks are the property of their respective owners in the United States and/or other countries.